
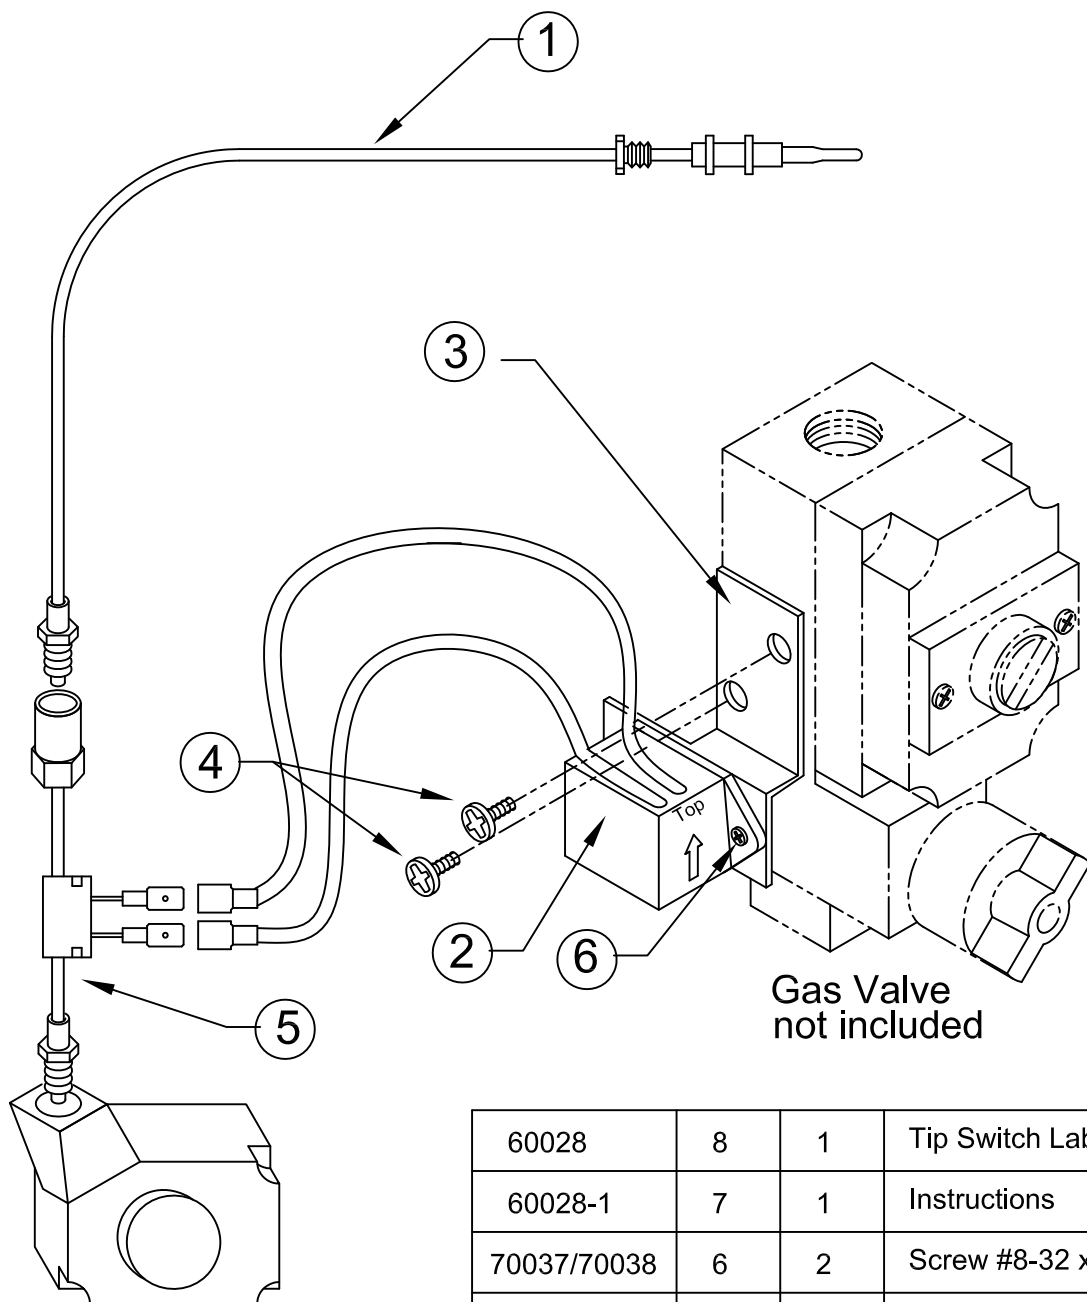


- Specifications:
1. Solid State Tip Switch
 2. Vibration Resistant
 3. 15 deg tip to off
 4. 60 second reset
 5. Non-Mercury type

Safety Magnet
on back of valve

Gas Valve
not included



60028	8	1	Tip Switch Label
60028-1	7	1	Instructions
70037/70038	6	2	Screw #8-32 x 3/8 / Nut
90032	5	1	Thermocouple Junction Block
70066	4	2	Screws,#10-24 x .250L
30624	3	1	Bracket, Tip Switch
90085	2	1	Tip Switch, PD6025-15W
90036	1	1	Thermo, ORKLI 21628 rev L

NO.	REVISION	DATE	BY	PART NO.	ITEM NO.	NO. REQ'D	DESCRIPTION
MAT'L:		SHEAR SIZE:		INFRARED DYNAMICS, INC. 3830 Prospect Avenue Yorba Linda, CA. 92886 U.S.A.			TOLERANCES: DEC. .XX ± .060 DEC. .XXX ± .0030 ANGLE +/- 1 DEG.
GAGE:		LB PER PART:					DWN BY DATE RLC 8/24/15
FINISH:		SHEET SIZE:					APP'D BY DATE RLC 8/24/15
THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF INFRARED DYNAMICS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THEIR WRITTEN PERMISSION				FOR: Sunglo A270		SCALE: None	DWG NO: 10314[A]
				TITLE: Tip Switch Kit			